

# SIZE GUIDE FOR SEATS

The following measurements are given as a guide.

Actual measurements may vary to accommodate production.

Seat fitting type: according to FIA regulations the seat must be fixed to the brackets by means of at least four bolts M8 class 8.8.

The diagram shows the distances between the fixing points in mm.


\* the weight refers to the complete seat (tolerance of 10%).

\*\* referring to bottom fixing points of the sliding guide.







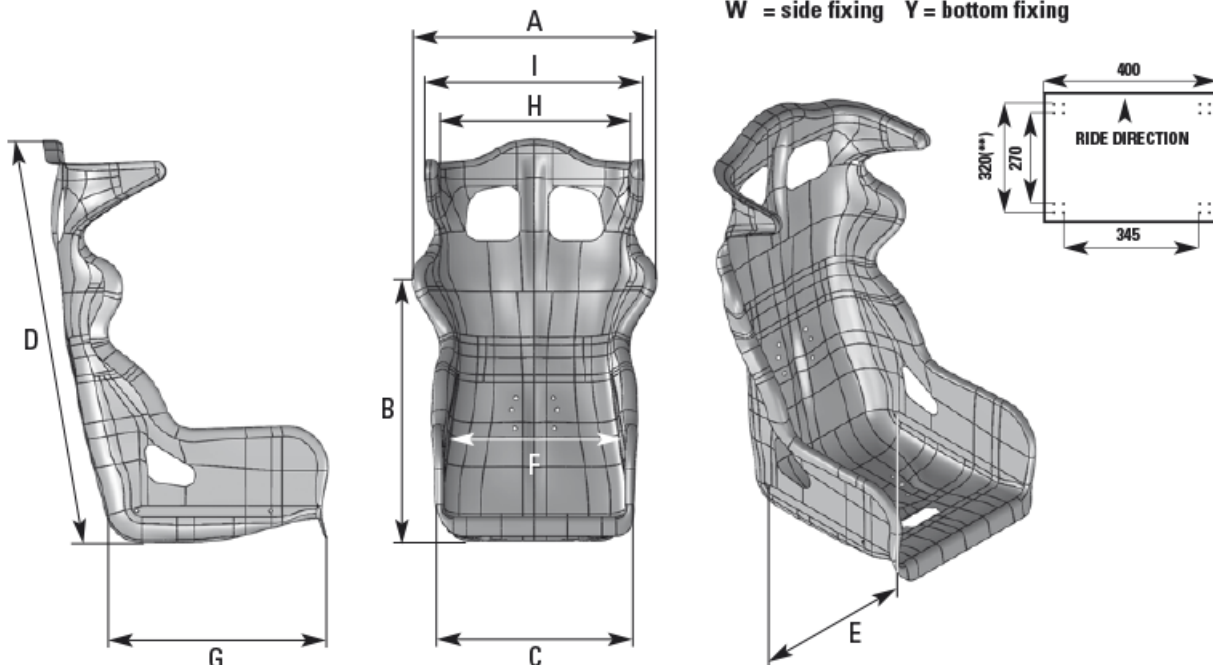

**TYPE W:** inner side int. 289 mm **TYPE Y:** bottom 345x270 mm

## LEGEND

- A external max width at shoulders
  - B seat bottom to mid shoulders
  - C external max width of side bolsters
  - D total height of seat back
  - E seat bottom max **external** width
  - F seat **inner** width (belt holes area)
  - G bottom length
  - H internal width between side head protections
  - I external width between side head protections
- W** = side fixing **Y** = bottom fixing




HOMOLOGATION	SHELL	AIRTEX® MATERIAL	CUSHIONS SPLIT LEG	MEASURE IN MM									HARNESSES SLOTS	WEIGHT* (KG)	FIXING		
				A	B	C	D	E	F	G	H	I					
<b>HTE ONE E</b>	HA/761E																
FIA 8862/2009	CARBON		✓	625	620	490	890	380	365	480	365	500	5	9.9	W		
<b>PROTOTIPO</b>	HA/745																
FIA 8855/1999	CARBON		✓	530	520	440	790	385	380	480	360	450	5	6,1	W		
<b>HTE</b>	HA/772																
FIA 8855/1999	FIBERGLASS	✓	✓	560	570	515	880	420	390	490	315	510	5	9.4	W		
<b>HTE 400</b>	HA/780																
FIA 8855/1999	FIBERGLASS	✓	✓	560	570	515	880	420	390	490	310	420	5	10.2	W		
<b>HTE XL</b>	HA/771																
FIA 8855/1999	FIBERGLASS	✓	✓	580	610	530	920	440	415	550	305	485	5	10.5	W		
<b>HTE CARBON</b>	HA/768																
FIA 8855/1999	CARBON	✓	✓	545	560	465	880	390	370	470	330	490	5	6.6	W		
<b>HTE CARBON XL</b>	HA/779																
FIA 8855/1999	CARBON	✓	✓	560	580	485	890	425	390	490	330	490	5	6.8	W		


HOMOLOGATION	SHELL	AIRTEX® MATERIAL	CUSHIONS SPLIT LEG	MEASURE IN MM											HARNESS SLOTS	WEIGHT* (KG)	FIXING	
				A	B	C	D	E	F	G	H	I						
<b>WRC HA/773</b>																		
FIA 8855/1999	FIBERGLASS	✓	✓	620	600	510	890	410	390	480	/	/	5	8.8	W			
<b>WRC CARBON HA/769</b>																		
FIA 8855/1999	CARBON	✓	✓	590	600	495	890	400	365	490	/	/	5	5.6	W			
<b>WRC XL HA/778</b>																		
FIA 8855/1999	FIBERGLASS	✓	✓	665	600	520	920	430	415	480	/	/	5	10.7	W			
<b>ARS HA/774</b>																		
FIA 8855/1999	FIBERGLASS	✓		590	600	500	910	395	370	490	/	/	5	8.9	W			
<b>ARS CARBON HA/770</b>																		
FIA 8855/1999	CARBON	✓		585	600	480	890	380	360	490	/	/	5	5.8	W			
<b>RS-PT. 2 HA/762</b>																		
FIA 8855/1999	FIBERGLASS			565	560	510	880	420	395	480	340	510	5	10.4	W			
<b>CHAMP HA/766</b>																		
FIA 8855/1999	FIBERGLASS			590	575	520	890	400	360	480	/	/	5	8.8	W			
<b>TRS PLUS HA/744</b>																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.3	W Y			
<b>TRS SKY HA/760</b>																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.8	W Y			
<b>TRS HA/741</b>																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.3	W Y			
<b>TRS XS HA/783</b>																		
FIA 8855/1999	TUBULAR STEEL			520	600	420	870	395	330	470	/	/	5	10.2	W Y			
<b>TRS XL HA/781</b>																		
FIA 8855/1999	TUBULAR STEEL			625	680	540	950	450	415	520	/	/	5	12.3	W			
<b>TRS SKY XL HA/782</b>																		
FIA 8855/1999	TUBULAR STEEL			625	680	540	950	450	415	520	/	/	5	12.9	W			
<b>TRS LEGEND HA/775 (PAG. 190)</b>																		
FIA 8855/1999	TUBULAR STEEL			585	640	510	890	410	390	470	/	/	5	10.8	W Y			

**LEGEND**

- A ext. max width at shoulders
- B seat bottom to mid shoulders
- C ext. max width of side bolsters
- D tot. height of seat back
- E seat bottom max width
- F seat inner width (belt holes area)
- W = side fixing (289 mm)
- Y = bottom fixing (345x270 mm)



\*\*\*  
HA/776E/N  
sliding brackets



SHELL	MEASURE IN MM						HARNESS SLOT	FIXING			
	A	B	C	D	E	F					
<b>STYLE / RAID2</b>									HA/719E/N	HA/776T/N	HA/776E/N
Tubular steel <i>Acciaio</i>	560	630	510	970	300	560	3	Y			
<b>DESIGN 2</b>									HA/736E/N		
Tubular steel <i>Acciaio</i>	540	640	510	950	310	560	2	Y			
<b>STRADA</b>									HA/750/N		
Tubular steel <i>Acciaio</i>	540	640	510	950	310	560	2	Y			
<b>RALLYE</b>									HA/728E/N		
Tubular steel <i>Acciaio</i>	580	610	490	900	350	480+22	4	W+Y			